



得豐實業有限公司
Dfwisdom Industrial CO., LTD

SCP 開縫型/止付螺絲固定式/塑膠撓性聯軸器 Slitted / Plastic Flexible Coupling



SCPW



SCPB

材質 | Material


塑膠 Plastic (黑、白/ black&white)

特性 | Features

1. 一體成型
2. 零背隙
3. 耐酸鹼
4. 絕緣佳
5. 偏角誤差較佳
6. 適合用於譯碼器
7. 溫度環境適用於70°C內。
8. 固定方式: 止付螺絲固定式

- One-body shape
- Zero backlash
- Acid-alkali resistance
- Great insulation
- High deflection
- Suitable for encoder
- The workable temperatures within 70°C
- Fixed mode : Set screw type.

型號 Catalog Number d1/孔徑 Inside dia d2/孔徑 Inside dia
SCP-16 - x

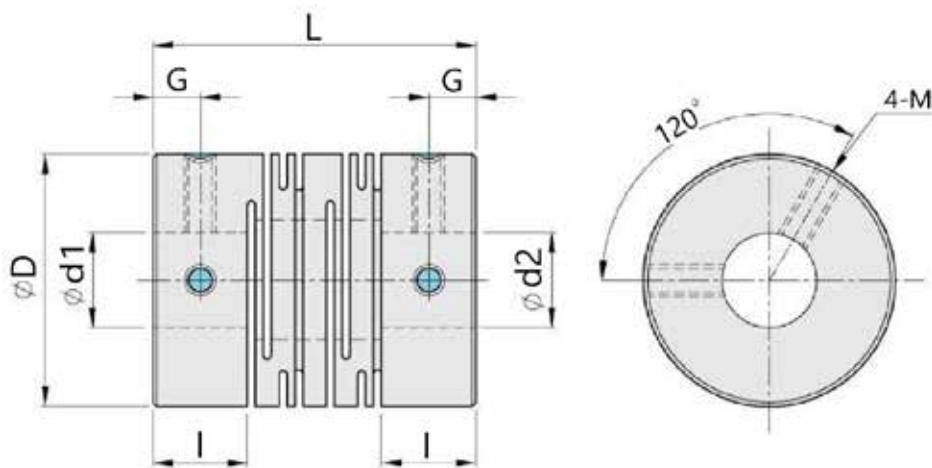

尺寸 Dimension

單位 / Unit : mm

Catalog Number 型號	D	I	L	G	M	d1xd2 標準孔徑(H7)		Mass** 重量(g)
						Min	Max	
SCP-16	16	6.5	23	3	M3	5	8	5
SCP-20	20	7.5	26	3.5	M4	6	8	8
SCP-25	25	8.5	31	4	M4	6	12	15

規格特性 Specifications Characteristics

單位 / Unit : mm

Catalog Number 型號	Ratad Torque 一般扭力 (N . m)	Max Torque 最大扭力 (N . m)	Max Rotational Frequency最高 回轉速(rpm/min)	Moment* of inertia 慣性 (kg . m ²)	Errors of Eccentricity 容許偏心(mm)	Errors of Angularity 容許偏角(°)	Errors of Shaft End-Play容許 軸向位差(mm)
SCP-16	0.15	0.3	6000	1.3x10 ⁻⁷	0.2	2.5	± 0.3
SCP-20	0.25	0.5	8000	4.0x10 ⁻⁷	0.2	2.5	± 0.3
SCP-25	0.5	1.0	10000	10.0x10 ⁻⁷	0.2	2.5	± 0.3